



# Xwave<sup>2</sup> Lite Module

## Introduction

The IDS Xwave<sup>2</sup> Lite Transceiver module is a stackable board for the new generation IDS alarm system. The Xwave<sup>2</sup> Lite plug-on module receives the IDS Xwave<sup>2</sup> Lite protocol from IDS Xwave<sup>2</sup> Lite detectors and remote transmitters.

**NOTE:** Please see the Installer manuals for the alarm system and the detector manuals for programming instructions.


## Xwave<sup>2</sup> Lite Plug-on Module

Power LED – On when power is applied

Panel LED – Flashes when communicating with the panel

Radio RX LED – Flashes when receiving data from a transmitter

Radio TX LED – Flashes when transmitting data

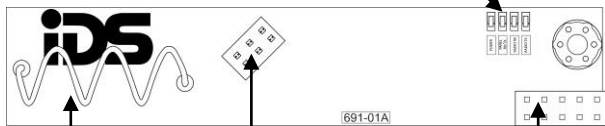

Antenna

Connectors to connect a daughter board

## Specifications

Frequency	869.52 MHz
Transmit RF Power	14dBm
Voltage	9 – 12VDC
Current	25mA
Range	Up to 300m line of site