




MotionSense



MotionSense Pet friendly sensor

Part of 





DETECTION COVERAGE

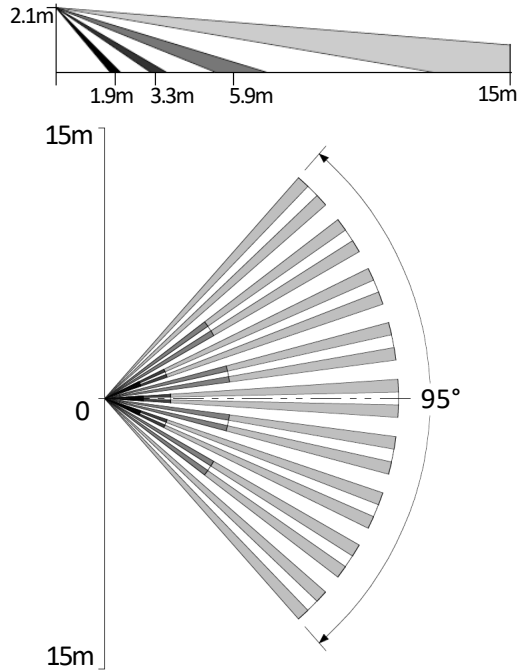


FEATURES

- 15m detection range with 95° angle
- Wireless Xwave² and Xwave² Lite protocols
- Up to 600m line of sight transmission
- Unique and convenient front access for configuring and wiring
- Small pet and rodent immunity (15kg max.)
- Selectable LED indication
- 120 second battery saver time
- Configurable walk test and pulse counts
- Mountable on flat surfaces or in corner
- Optional swivel bracket for both ceiling or wall mounting

CONFIGURATION


Dipswitches	Description
	Future Use
	ON = LED ENABLED OFF = LED DISABLED
	ON = 2 PULSE DETECTION OFF = 4 PULSE DETECTION
	ON = WALK TEST OFF = BATTERY SAVER

INSTALLATION

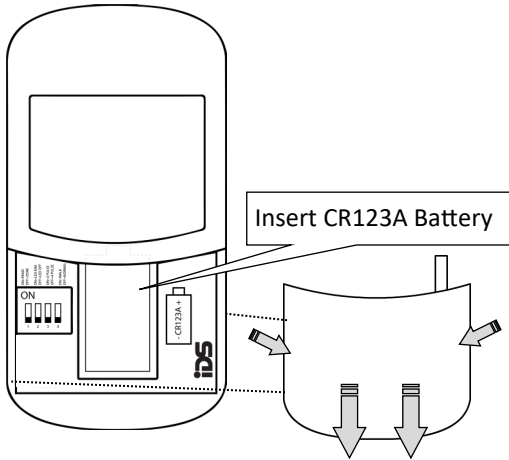


- Remove the bottom cover by pinching and sliding downward.
- Set configuration using the dipswitches.
- Remove battery tab and replace the bottom cover.
- Do a thorough Walk Test after power up.

INSTALLATION TIPS

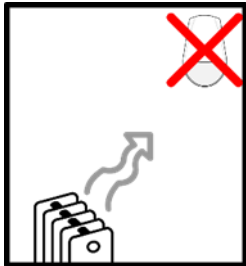


Do not expose to heating or cooling objects.



Prevent direct sun light from reaching the PIR.




Do not install behind any object that would block the PIR.



Pets 15Kg and smaller. Avoid any areas pets can climb.

MOUNTING

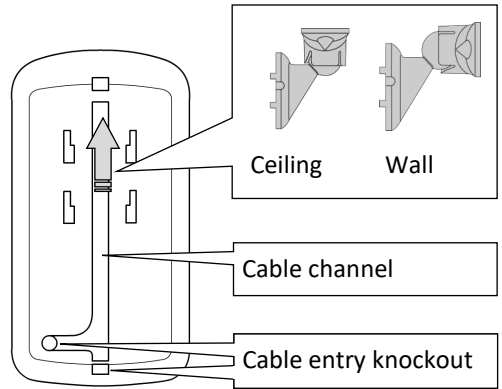

- If using, attach the optional bracket securely to the wall or ceiling and slide the detector onto the brackets vertical slots.
- Knock out the cable entry opening and feed wire through opening and into PIR.

SPECIFICATIONS

Power	CR123A Battery
Battery Life	2 years typical use
Wireless Transmission	869,52 MHz
Transmission Range	100m line of sight
Battery Saver	120 seconds
Temp Range	-10°C to +55°C
Pulse Count	2 or 4
Viewing Angle	95°
Mounting Height	2.1m — 2.4m
“Warmup” Period	± 45 seconds
Detection Range	up to 15m



Only use the manufacturer approved or equivalent battery. Dispose of batteries in compliance with environmental regulations of your country.