

The Complex Receiver Version 3 model is specifically designed to be installed onto motorised gate entrances of town-house complexes, residential estates, office parks, small businesses, golf estates schools or even boomed off residential areas.

The Complex Receiver has easy to understand menu's for learning in or deleting remotes & setting the time & date. The unit is also password protected so that unauthorised persons cannot learn in or delete out remotes. A microSD card can be inserted into the unit to make a backup of the remotes and download the events log. If the microSD card is left in the unit, the unit will detect that the card is present and write events when they occur to the card into a text file. Over a million events may be listed in the file which means that you will have full records of all events the unit has logged.

Features


- 2 Channel relay output
- Code-Hopping encryption
- 8000 remotes can be learnt
- Real time & date clock event
- 2000 event time & date internal
- microSD card compatible FAT32
- Backing up via microSD card
- Installing via microSD card
- Software application available
- USB 2.0 coms port compatible
- Password protected
- Backward compatible to VER2

Complex Gate RECEIVER



Specification:

Encryption:	Code-Hopping
Range:	100m (Open air)
Frequency:	403MHz
Memory Capacity:	4000 per Channel
Event logging :	2000 events eProm
microSD 4GB:	>1 million
Voltage Range:	10V to 14V DC
Current draw:	11mA @ 12V
Dimensions (lxbxh):	115 x 82 x 31mm
Gross Weight packed:	230 grams
Operating Temp:	-5°C to 60°C
Warranty:	24 Months
Release Date:	March 2012

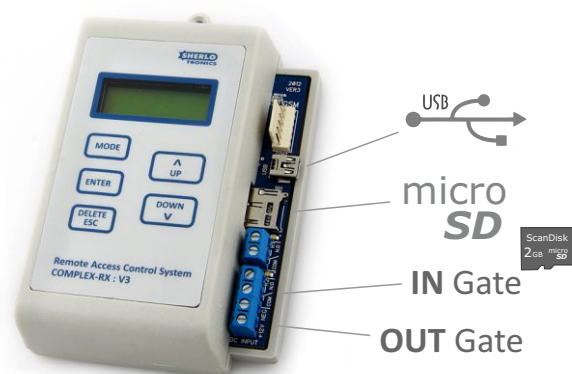

Order Code

4000 User 2Ch Complex Receiver. Micro SD Card

COMPLEX_RX-V3