




hyup Smart solutions

hyup Is our range of smart GSM and IP devices that enables full control of the home or business via our hyup smart phone App. hyup Offers users complete overview of their IDS alarm system with push notifications, automation control, live video, and video verification.

The **hyyp** communicator offers real time, secure and reliable messaging through to professional monitoring centres.

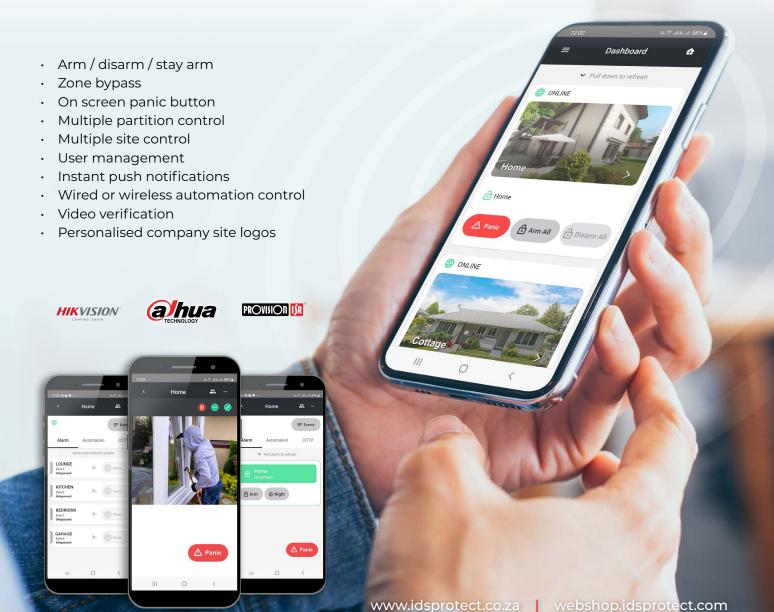





hyup Video verification



View, receive and review live video and events for effective site management and alarm verification.







Using the **hyup** module with any of these three network connected CCTV systems, **20-seconds** of video footage can be retrieved (10 seconds pre-alarm) by tapping the camera icon on the notifications screen.



With an internet connected CCTV system and an IDS alarm panel, adding a **hypp Communicator** makes all these features available.



To set up, simply scan the **QR code** and link the alarm zones and video channels. When the alarm activates, the linked video feed will be available via **hyup** notifications.



Once the CCTV system is connected to the internet **no additional cabling** is required, as the link between the DVR and **hyyp** is virtual.

806



XSERIES





hyyp Features



Multiple site control

View and control multiple sites from one App



Partition control

Multiple partition control



Automation control

Activate wired or wireless outputs for any automation requirements.




Control

Arm / disarm / stay arm



Push notifications

Receive push notifications from alarm activations



Video integration

Live video and event verification



Bypass zones

Bypass and un-bypass zones



Notifications

Audit trail of all alarm panel events




Control room contact

Call the Monitoring Centre directly from the App






hyyp Portal

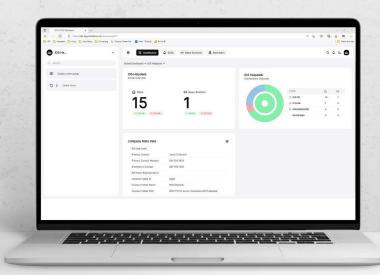


The HYYP portal is a powerful management tool. The Portal provides a full overview of all modules and base stations, including of network connections, device details and live events.


Real time monitoring of base station events

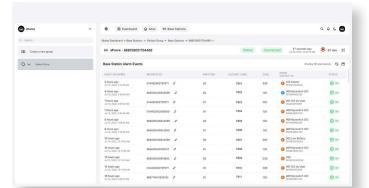


Management of individual HYYP units

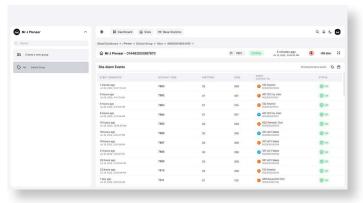

Monitor unit connectivity

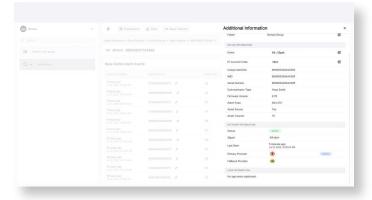

Search by account code / IMEI

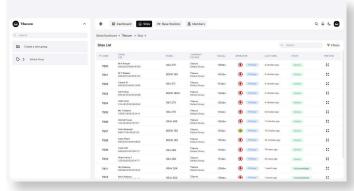





hyup Module solution

hyup GSM Solutions make use of a smart single GDSP SIM card that automatically switches to a secondary network when the primary network is unavailable.

- Contract required for App and monitoring centre reporting
- Pre-paid options available for App usage only
- Automatic time updates for event log accuracy



hyyp Plug on module

860-684-001

- Plugs directly onto the IDS 806
- ${\sf GSM}\ communication$
- App support

hyyp Serial module

860-616-001

- Connects via serial port of the IDS alarm panel
- GSM communication
- App support

hyyp Alert module

860-614-001

- Reports Contact ID from 3rd party alarm systems
- Connection via dialler or I/Os
- GSM communication no App

hyyp IP / Wi-Fi module

860-36-0693

- Connects to local Internet
- No monthly subscription for App
- WPS Router required



hyyp Modem

860-540-003-1

- GSM programming of IDS control panels connected to hyyp
- Remote event log access Secure encryption providing high security



Dual SIM base station

860-540-008

- Required for central monitoring stations
- Dual SIM cards with 2/3/4G capability Connection to 3rd party monitoring software via RS232 cable.

Product specifications and availability are subject to change without notice. E&OE.